


Temperature Measurement

Transmitters for mounting in sensor head

SITRANS TH100
two-wire system (Pt100)

Overview

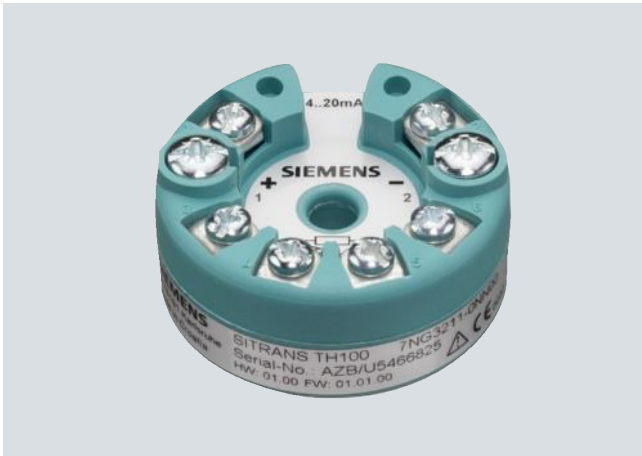

The SITRANS TH100 dispenses with electrical isolation and universal sensor connection to provide a low-cost alternative for Pt100 measurements.

For the parameterization, the SIPROM T software is used in combination with the modem for SITRANS TH100/TH200.

Its extremely compact design makes the SITRANS TH100 ideal for the retrofitting of measuring points or for the use of analog transmitters.

The transmitter is available as a non-Ex version as well as for use in potentially explosive atmospheres.

Benefits

- Two-wire transmitter
- Assembly in connection head type B (DIN 43729) or larger, or on a standard DIN rail
- Can be programmed, which means that the sensor connection, measuring range, etc. can also be programmed
- Intrinsically-safe version for use in potentially explosive areas

Application

Used in conjunction with Pt100 resistance thermometers, the SITRANS TH100 transmitters are ideal for measuring temperatures in all industries. Due to its compact size it can be installed in the connection head type B (DIN 43729) or larger.

The output signal is a direct current from 4 to 20 mA that is proportional to the temperature.

Parameterization is implemented over the PC using the parameterization software SIPROM T and the modem for SITRANS TH100/TH200. If you already have a "modem for SITRANS TK" (Order No. 7NG3190-6KB), you can continue using this to parameterize the SITRANS TH100.

Transmitters of the "intrinsically-safe" type of protection can be installed within potentially explosive atmospheres. The devices comply with the Directive 94/9/EC (ATEX), as well as FM and CSA regulations.


Function

Mode of operation

The measured signal supplied by a Pt100 resistance thermometer (2, 3 or 4-wire system) is amplified in the input stage. The voltage, which is proportional to the input variable, is then converted into digital signals by a multiplexer in an analog/digital converter. They are converted in the microcontroller in accordance with the sensor characteristics and further parameters (measuring range, damping, ambient temperature etc.).

The signal prepared in this way is converted in a digital/analog converter into a load-independent direct current of 4 to 20 mA.

An EMC filter protects the input and output circuits against electromagnetic interferences.

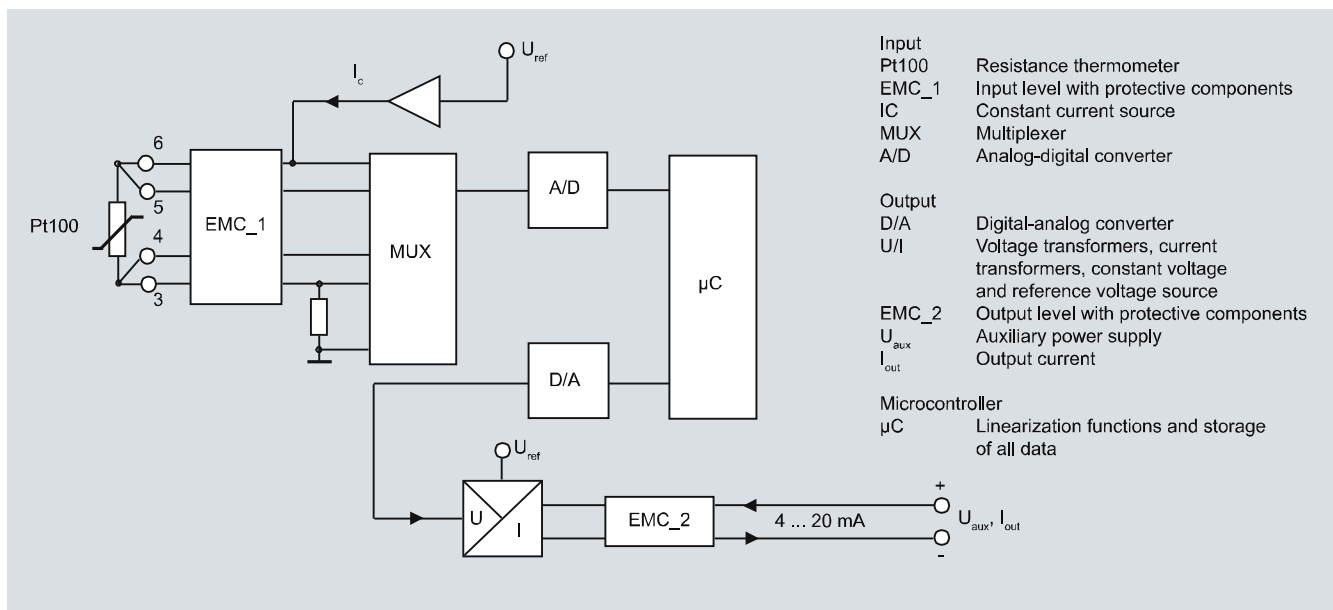

SITRANS TH100, function diagram

Temperature Measurement

Transmitters for mounting in sensor head

SITRANS TH100 two-wire system (Pt100)

Technical specifications

Input

Resistance thermometer

Measured variable	Temperature
Sensor type	PT100 to IEC 60751
Characteristic curve	Temperature-linear
Type of connection	2-, 3- or 4-wire circuit
Resolution	14 bit
Measuring accuracy	
• Span <250 °C (450 °F)	< 0.25 °C (0.45 °F)
• Span >250 °C (450 °F)	< 0.1 % of span
Repeatability	< 0.1 °C (0.18 °F)
Measuring current	approx. 0.4 mA
Measuring cycle	< 0.7 s
Measuring range	-200 ... +850 °C -328 ... +1562 °F)
Measuring span	25 ... 1050 °C (77 ... 1922 °F)
Unit	°C or °F
Offset	programmable: -100 ... +100 °C (-180 ... +180 °F)
Line resistance	Max. 20 Ω (total from feeder and return conductor)
Noise rejection	50 and 60 Hz

Output

Output signal	4 ... 20 mA, two-wire
Auxiliary power	8.5 ... 36 V DC (30 V for Ex ia and ib; 32 V for Ex nL/ic; 35 V for Ex nA)
Max. load	(U _{aux} - 8.5 V)/0.023 A
Overrange	3.6 ... 23 mA, infinitely adjustable (default range: 3.84 ... 20.5 mA)
Error signal (following sensor fault) (conforming to NE43)	3.6 ... 23 mA, infinitely adjustable (default range: 3.6 mA or 22.8 mA)
Damping time	0 ... 30 s (default value: 0 s)
Protection	Against reversed polarity
Resolution	12 bit
Accuracy at 23 °C (73.4 °F)	< 0.1 % of span
Temperature effect	< 0.1 %/10 °C (0.1 %/18 °F)
Effect of auxiliary power	< 0.01 % of span/V
Effect of load impedance	< 0.025 % of max. span/100 Ω
Long-term drift	<ul style="list-style-type: none"> < 0.025 % of the max. span in the first month < 0.035 % of the max. span after one year < 0.05 % of the max. span after 5 years

Ambient conditions

Ambient temperature range	-40 ... +85 °C (-40 ... +185 °F)
Storage temperature range	-40 ... +85 °C (-40 ... +185 °F)
Relative humidity	98 %, with condensation
Electromagnetic compatibility	According to EN 61326 and NAMUR NE21

Construction

Weight	50 g
Dimensions	See dimensional drawing
Material	Molded plastic
Cross-section of cables	Max. 2.5 mm ² (AWG 13)
Degree of protection to IEC 60529	
• Enclosure	IP40
• Terminals	IP00

Certificates and approvals

Explosion protection ATEX

EC type test certificate

- "Intrinsic gas safety" type of protection

- "Non-sparking" type of protection

- "Intrinsic dust safety" type of protection

Explosion protection FM for USA and Canada (cFM_{US})

- FM approval
- Degree of protection

Other certificates

Software requirements for SIPROM T

PC operating system

PTB 05 ATEX 2049X

II 1 G Ex ia IIC T6/T4

II (1) 2 G Ex ib [ia Ga] IIC T6/T4 Gb

II (1) 3 G Ex ic [ia Ga] IIC T6/T4 Gc

II 3 G Ex ic IIC T6/T4 Gc

II 3 G Ex nA IIC T6/T4 Gc

II 3 G Ex nA[ic] IIC T6/T4 Gc

II 1 D Ex ia IIIC T115 °C Da

PID 3024169

IS CI I, II, III, Div 1, GP ABCDEFG T4/T5/T6

CI I, ZN 0,1 AEx ia IIC T4/T5/T6

NI CI I, II, III, Div 2, GP ABCDFG T4/T5/T6

CI I, ZN 2, NI IIC T4/T5/T6

GOST, NEPSI, PESO

Windows ME, 2000 and XP; also Windows 95, 98 and 98SE, but only in connection with RS 232 modem.

Temperature Measurement

Transmitters for mounting in sensor head

SITRANS TH100
two-wire system (Pt100)

Selection and Ordering data	Order No.
SITRANS TH100 temperature transmitters for Pt100 for installation in connection head, type B (DIN 43729), two-wire system, 4 ... 20 mA, programmable, without electrical isolation	
<ul style="list-style-type: none"> Without explosion protection 	7NG3211-0NN00
<ul style="list-style-type: none"> With explosion protection "Intrinsic safety" type of protection and for zone 2 	7NG3211-0AN00
<ul style="list-style-type: none"> - to ATEX - to FM (cFMUS) 	7NG3211-0BN00
Further designs	Order code
Add "-Z" to Order No. and specify Order code(s)	
Test report (5 measuring points)	C11
Customer-specific programming	
Add "-Z" to Order No. and specify Order code(s)	
Measuring range to be set	Y01¹⁾
Enter in plain text (max. 5 digits): Y01: ... to ... °C, °F	
Measuring point no. (TAG), max. 8 characters	Y17¹⁾
Measuring point descriptor, max. 16 characters	Y23¹⁾
Pt100 (IEC) 2-wire, $R_L = 0 \Omega$	U02¹⁾
Pt100 (IEC) 3-wire	U03¹⁾
Pt100 (IEC) 4-wire	U04¹⁾
Special differing customer-specific programming, specify in plain text	Y09²⁾
Fail-safe value 3.6 mA (instead of 22,8 mA)	U36¹⁾
Accessories	Order No.
Modem for SITRANS TH100, TH200 and TR200 incl. SIPROM T parameterization software With USB connection	7NG3092-8KU
CD for measuring instruments for temperature With documentation in German, English, French, Spanish, Italian, Portuguese and SIPROM T parameterization software	A5E00364512
DIN rail adapters for head transmitters (Quantity delivered: 5 units)	7NG3092-8KA
Connecting cable 4-wire, 150 mm, for sensor connections when using head transmitters in the high hinged cover (set with 5 units)	7NG3092-8KC

► Available ex stock.

¹⁾ Here, you enter the initial and final value of the desired measurement range for customer-specific programming for RTD and TC.

²⁾ If needed, here you can mention settings, which cannot be specified with existing order codes (e.g.: programming for mV, Ω).

Supply units see Chap. 8 "Supplementary Components".

Ordering example

7NG3211-0NN00-Z Y01+Y23+U03


Y01: 0... 100 °C

Y23: TICA1234HEAT

Factory setting:


- Pt100 (IEC 751) with 3-wire circuit
- Measuring range: 0 ... 100 °C (32 ... 212 °C)
- Error signal in the event of sensor breakage: 22.8 mA
- Sensor offset: 0 °C (0 °F)
- Damping 0.0 s

Dimensional drawings

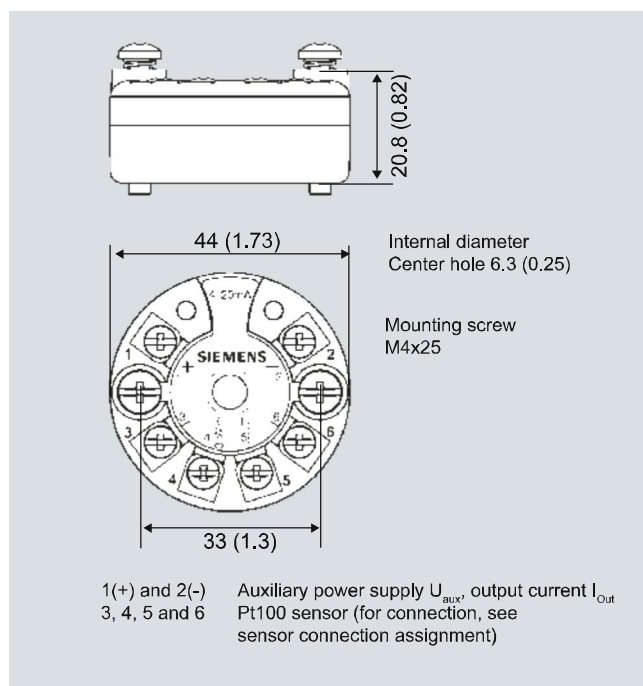


SITRANS TH100, dimensions in mm (inch)

Mounting on DIN rail

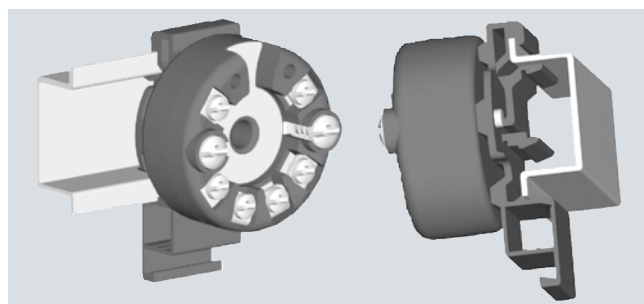

SITRANS TH100, mounting of transmitter on DIN rail

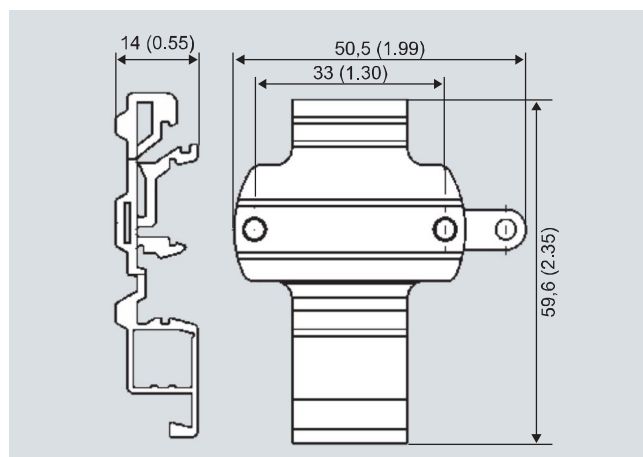


DIN rail adaptor, dimensions in mm (inch)

Temperature Measurement

Transmitters for mounting in sensor head

SITRANS TH100
two-wire system (Pt100)

Schematics

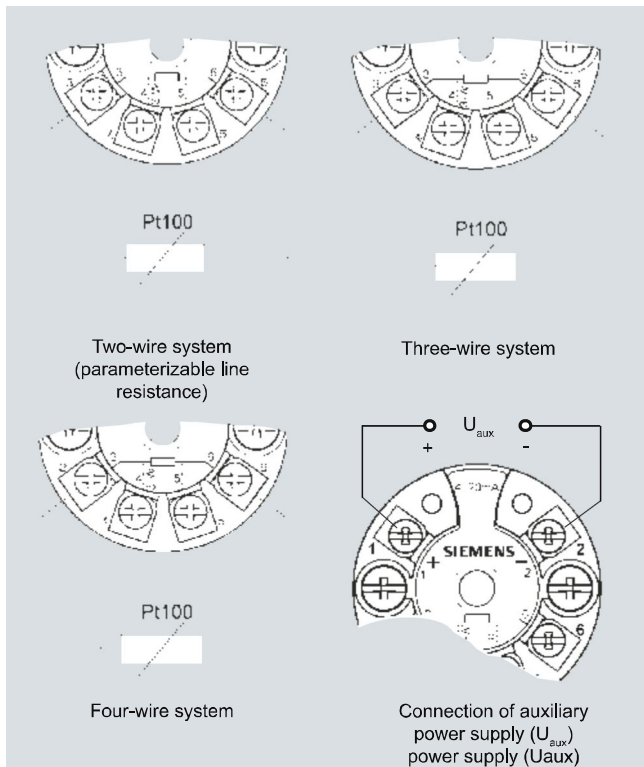

SITRANS TH100, sensor connection assignment