

Level measurement

Continuous level measurement – Ultrasonic controllers

SITRANS LU01 and LU02

Overview



The SITRANS LU01 is an ultrasonic long-range level controller for liquids and solids in a single vessel up to 60 m (200 ft). Handheld programmer shown is an accessory and must be ordered separately.

Overview



The SITRANS LU02 is a dual point ultrasonic long-range level controller for liquids and solids in one or two vessels up to 60 m (200 ft). Handheld programmer shown is an accessory and must be ordered separately.

Benefits

- Single point, long-range level monitoring
- Easy to install; easy to program using removable infrared keypad (optional)
- Compatible with all EchoMax transducers
- Backlit LCD display with reading in standard engineering units
- Automatic level-to-volume conversion for standard or custom tank shapes
- Dolphin Plus and SmartLinx compatible
- High/low alarms

Application

The system consists of a SITRANS LU01 monitor linked to a non-contacting ultrasonic transducer that can be mounted up to 365 m (1 200 ft) away. The SITRANS LU01 will measure distance, level or volume, and it features patented Sonic Intelligence echo processing software for superior reliability.

Readings are displayed in user-selectable linear engineering units on the backlit LCD.

An on-board communications port automatically configures for RS 232, RS 485 or bi-polar current loop. The SITRANS LU01 will connect to a DCS or PLC using Siemens SmartLinx interface modules, giving you remote 2-way communication and full parameter access.

Modules for popular industrial buses can be factory installed or added later to meet changing needs. No external gateway is required, reducing hardware and cabling costs.

- Key Applications: chemical storage, liquid storage, bulk solids storage (gravel, flour bins, grains, cereals), plastic pellets

Benefits

- Dual point, long-range level monitoring
- Easy to install; easy to program using removable infrared keypad (optional)
- Compatible with all EchoMax transducers
- Backlit LCD display with reading in standard engineering units
- Automatic level-to-volume conversion for standard or custom tank shapes
- Dolphin Plus and SmartLinx compatible
- High/low alarms

Application

SITRANS LU02 will measure liquids, solids or a combination of both in one or two vessels of different sizes, shapes and configurations up to 60 m (200 ft).

The system uses ultrasonic technology to measure level, space, distance, volume or average/differential. It features patented Sonic Intelligence echo processing software for superior reliability. Transducers can be mounted up to 365 m (1 200 ft) from the monitor.

Readings are displayed in user-selectable linear engineering units on the backlit LCD.

It features an onboard communications port that automatically configures for RS 232, RS 485 or bi-polar current loop. It will connect to a DCS or PLC using Siemens SmartLinx interface modules, giving you remote 2-way communication and full parameter access. Modules for popular industrial buses can be factory installed or added later to meet changing needs. No external gateway is required, reducing hardware and cabling costs.

- Key Applications: chemical storage, liquid storage, bulk solids storage (gravel, flour bins, grains, cereals), plastic pellets, tripper car

Level measurement

Continuous level measurement – Ultrasonic controllers

SITRANS LU01 and LU02

Technical specifications

Mode of operation	
Measuring principle	Ultrasonic level measurement
Measuring range	0.3 ... 60 m (1 ... 200 ft)
Measuring points	SITRANS LU01: Max. one point; SITRANS LU02: Max. two points
Output signal	
Ultrasonic transducer	EchoMax series, ST-H transducers
Relays	4 SPDT Form C relays, rated at 5 A at 250 V AC, resistive load
mA output	0/4 ... 20 mA, optically isolated
• Max. load	750 Ω , isolated, 30 V
• Resolution	0.1 % of range
• Outputs	SITRANS LU01: Max. one mA output SITRANS LU02: Max. two mA outputs
Accuracy	
Error in measurement	0.25 % of range or 6 mm (0.24 inch), whichever is greater
Resolution	0.1 % of measuring range or 2 mm (0.08 inch), whichever is greater
Temperature compensation	-50 ... +150 °C (-58 ... +302 °F) • Integral temperature sensor • External TS-3 temperature sensor (optional) • Programmable fixed temperature
Rated operating conditions	
Ambient conditions	
Ambient temperature for enclosure	-20 ... +50 °C (-4 ... +122 °F)
Design	
Weight	2.7 kg (6 lb)
Material (enclosure)	Polycarbonate
Degree of protection (wall mount)	IP65
Electrical connection	
Ultrasonic transducer cable extension	RG62-A/U coaxial cable with low capacitance
mA output signal	2-core copper conductor, twisted, shielded, 0.5 ... 0.75 mm ² (22 ... 18 AWG), Belden 8760 or equivalent is acceptable
Electrical connection and relay connection	Copper conductor according to local requirements, rated 250 V 5 A
Synchronization	Up to 16 LU01/LU02 units can be synchronized together

Power supply	
AC model	100/115/200/230 V AC \pm 15 %, 50/60 Hz, 31 VA
DC model	18 ... 30 V DC, 25 W
Displays and controls	
Memory	EEPROM (non-volatile), no backup battery required
Programming	Using removable programmer (ordered separately) or Dolphin Plus (option)
Certificates and approvals	
CE, CSA _{US/C} , FM, ATEX II 3D Lloyd's register of Shipping (Categories ENV1, ENV2, ENV3 and ENV5)	
Options	
External temperature sensor	TS-3
Communications	<ul style="list-style-type: none"> SmartLinx: protocol-specific modules as interface for popular industrial fieldbus systems Dolphin Plus: Siemens Windows-compatible interface and ComVerter link (infrared)

Selection and Ordering data

SITRANS LU01/LU02
Single or dual point ultrasonic long-range level monitoring system for liquids and solids, and ranges up to 60 m (200 ft).

Number of measuring points

LU01 version, 1 point
LU02 version, 2 points

Input voltage

100/115/200/230 V AC, voltage selector switch
18 ... 30 V DC

Feature software

Standard

Application software

Standard

Data communications

No module (SmartLinx ready)
SmartLinx Allen-Bradley Remote I/O module
SmartLinx PROFIBUS DP module
SmartLinx Modbus RTU module

Enclosure

Wall mount
Wall mount, drilled, 6 x M20
Note: Cable glands are not included and should be ordered as a separate line on the order.

Approvals

CE, CSA_{US/C}, FM¹⁾
CE
ATEX II 3D²⁾

¹⁾ Available with enclosure option 1 only

²⁾ Available with enclosure option 3 only

Order No.

7ML5004-

1	A	0	1	2	3	1	3	A	B	C
---	---	---	---	---	---	---	---	---	---	---

Level measurement

Continuous level measurement – Ultrasonic controllers

SITRANS LU01 and LU02

Selection and Ordering data

Order code

Further designs

Please add **"-Z"** to Order No. and specify Order code(s).

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]:
Measuring-point number/identification
(max. 27 characters) specify in plain text

Y15

Operating Instructions

SITRANS LU01

English

7ML1998-5BE02

French

7ML1998-5BE12

German

7ML1998-5BE32

SITRANS LU02

English

7ML1998-5BD02

French

7ML1998-5BD12

German

7ML1998-5BD32

Note: The Operating Instructions should be ordered as a separate line item.
This device is shipped with the Siemens Milltronics manual CD containing the complete ATEX Quick Start and Operating Instructions library.

Other Operating Instructions

SmartLinx Allen-Bradley Remote I/O, English

7ML1998-1AP03

SmartLinx PROFIBUS DP, English

7ML1998-1AQ03

SmartLinx PROFIBUS DP, German

7ML1998-1AQ33

SmartLinx PROFIBUS DP, French

7ML1998-1AQ13

SmartLinx Modbus, English

7ML1998-1BF01

SmartLinx Modbus, German

7ML1998-1BF31

SmartLinx Modbus, French

7ML1998-1BF11

SmartLinx Modem, English

7ML1998-1BG01

Note: The appropriate SmartLinx Operating Instructions should be ordered as a separate line on the order.

Accessories

Handheld programmer

7ML1830-2AN

Tag, stainless steel, 12 x 45 mm (0.47 x 1.77 inch), one text line, suitable for enclosures

7ML1930-1AC

M20 cable gland kit (6 M20 cable glands, 6 M20 nuts, 3 stop plugs)

7ML1830-1GM

M20 cable gland kit (4 M20 cable glands, 4 M20 nuts, 4 washers)

7ML1930-1FV

TS-3 Temperature Sensor - see TS-3 on page 4/206

7ML1830-2AN

Sunshield kit, 304 SS

7ML1930-1GA

Spare parts

Card, LU01 mother main, AC, comm ready

7ML1830-1KX

Card, LU02 mother main, AC, comm ready

7ML1830-1MA

Card, LU02 daughter, comm ready

7ML1830-1LP

Card, LU01 daughter, comm ready

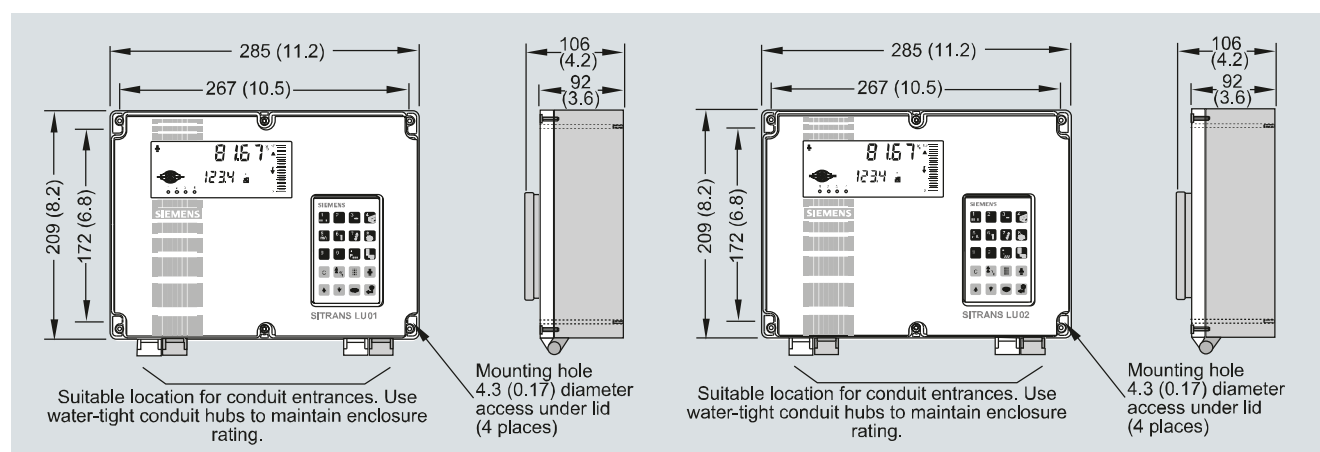
7ML1830-1LN

Card, display

See SmartLinx product page 4/343 for more information.

7ML1830-1LQ

Dimensional drawings



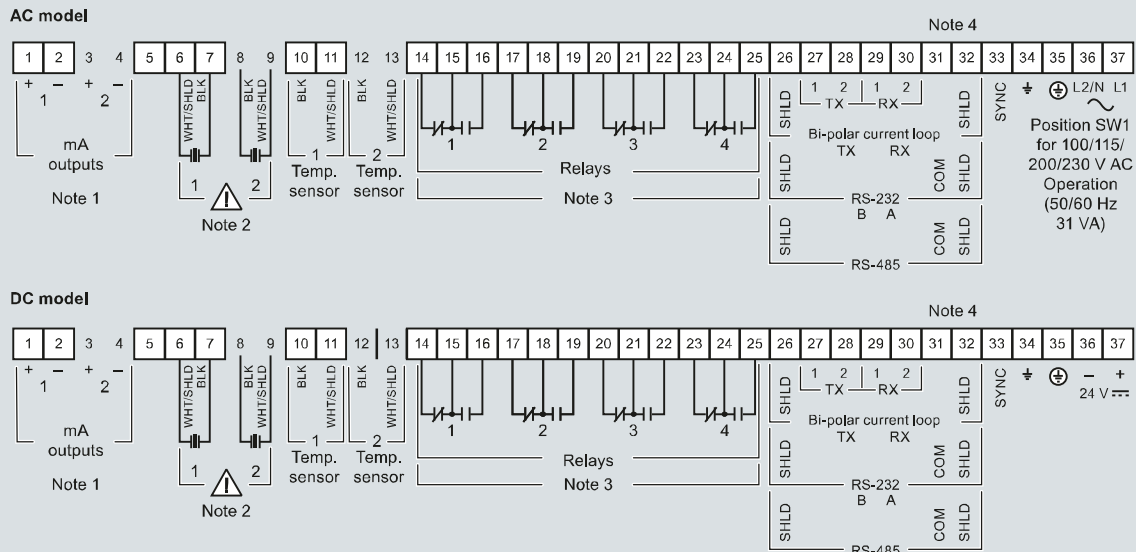
Dimensional drawings for SITRANS LU01 (left) and SITRANS LU02 (right), dimensions in mm (inch)

Level measurement

Continuous level measurement – Ultrasonic controllers

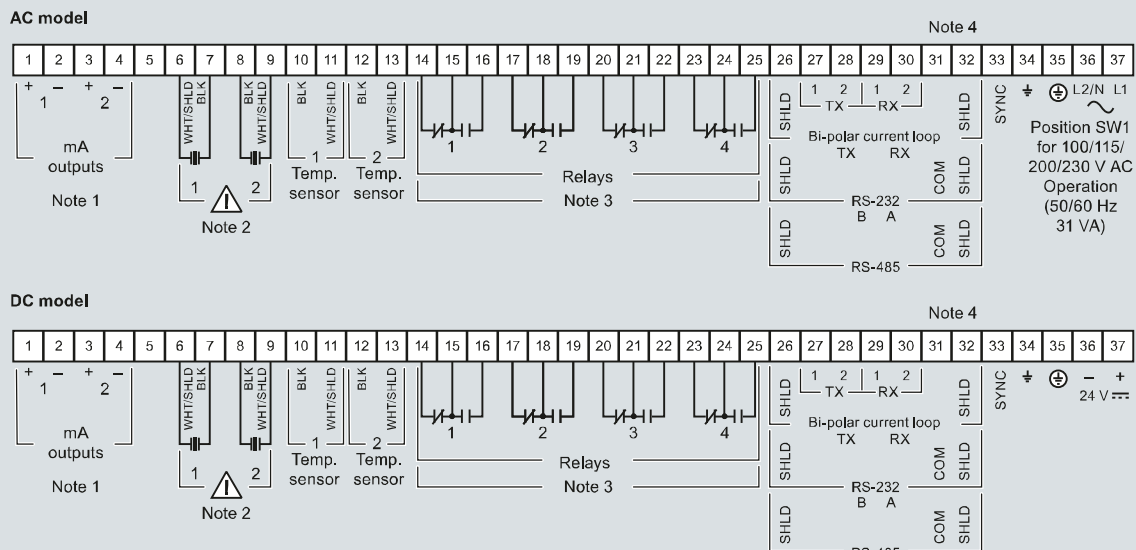
SITRANS LU01 and LU02

Schematics

**Notes:**

1. Optically isolated, 750 Ω max. load
2. Use RG62-A/U coaxial (or equivalent) for extensions up to 365 m (1 200 ft).
Run in grounded metal conduit, separate from other wiring.
3. Each relay has 1 set of Form 'C' (SPDT) contacts, relay rated at 5 A 250 V AC, non-inductive, when equal or lower rated limiting fuses are installed.
4. Required if mounted adjacent to other SITRANS LU01 units or other specified Siemens Milltronics devices. Interconnect all 'SYNC' terminals with a single 18 AWG (0.5mm²) wire.

SITRANS LU01 connections

**Notes:**

1. Optically isolated, 750 Ω max. load
2. Use RG62-A/U coaxial (or equivalent) for extensions up to 365 m (1 200 ft).
Run in grounded metal conduit, separate from other wiring.
3. Each relay has 1 set of Form 'C' (SPDT) contacts, relay rated at 5 A 250 V AC, non-inductive, when equal or lower rated limiting fuses are installed.
4. Required if mounted adjacent to other SITRANS LU01 units or other specified Siemens Milltronics devices. Interconnect all 'SYNC' terminals with a single 18 AWG (0.5 mm²) wire.

SITRANS LU02 connections